

VSH Press

6 Programma di fornitura

75

6.2 VSH Press Acciaio inossidabile GAS



R 2750 Tubo in acciaio inossidabile


(lunghezza 6m)



Dimensione	DN	N° articolo
15 x 1,0	12	26010
18 x 1,0	15	26012
22 x 1,2	20	26014
28 x 1,2	25	26016
35 x 1,5	32	26018
42 x 1,5	40	26020
54 x 1,5	50	26022
76,1 x 2,0	65	26024
88,9 x 2,0	80	26026
108 x 2,0	100	26028

R 2708G Gomito a 90° FF


(2 x pressato)



Dimensione	N° articolo	L	Z
15 x 15	21017	47	27
18 x 18	21018	54	34
22 x 22	21019	61	40
28 x 28	21020	72	49
35 x 35	21021	86	60
42 x 42	21022	112	82
54 x 54	21023	138	103

R 2701G Manicotto


(2 x pressato)



Dimensione	N° articolo	L	Z
15 x 15	21000	52	12
18 x 18	21001	53	13
22 x 22	21002	56	14
28 x 28	21003	62	16
35 x 35	21004	71	19
42 x 42	21005	78	18
54 x 54	21006	90	20

R 2711G Gomito a 90° maschio-femmina


(pressato x estremità di inserimento)



Dimensione	N° articolo	L	Z	H
15 x Ø15	21027	47	27	64
18 x Ø18	21028	54	34	72
22 x Ø22	21029	61	40	76
28 x Ø28	21030	72	49	91
35 x Ø35	21031	86	60	92
42 x Ø42	21032	112	82	119
54 x Ø54	21033	138	103	145

R 2703G Manicotto lungo


(2 x pressato)



Dimensione	N° articolo	L	es
15 x 15	21010	74	25
18 x 18	21011	78	25
22 x 22	21012	82	25
28 x 28	21013	92	30
35 x 35	21014	99	30
42 x 42	21015	114	40
54 x 54	21016	138	40

R 2713G Gomito a 45° FF


(2 x pressato)

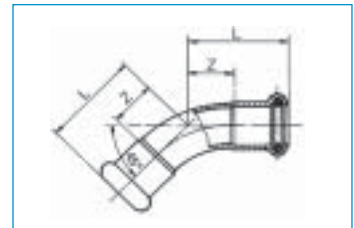

Dimensione	N° articolo	L	Z
15 x 15	21037	36	16
18 x 18	21038	37	17
22 x 22	21039	43	22
28 x 28	21040	50	27
35 x 35	21041	58	32
42 x 42	21042	72	42
54 x 54	21043	85	50

R 2712G Gomito a 45° maschio-femmina


(pressato x estremità di inserimento)

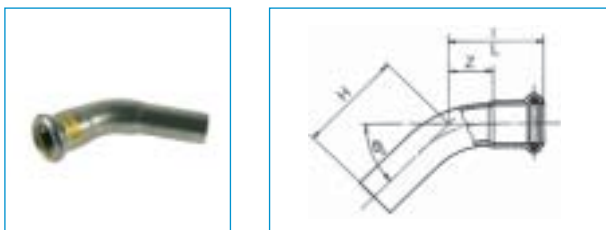

Dimensione	N° articolo	L	Z	H
15 x Ø15	21047	36	16	46
18 x Ø18	21048	37	17	48
22 x Ø22	21049	43	22	51
28 x Ø28	21050	50	27	57
35 x Ø35	21051	54	28	68
42 x Ø42	21052	68	38	82
54 x Ø54	21053	81	46	96

R 2715G Raccordo a T ridotto

(con uscita ridotta, 3 x pressato)

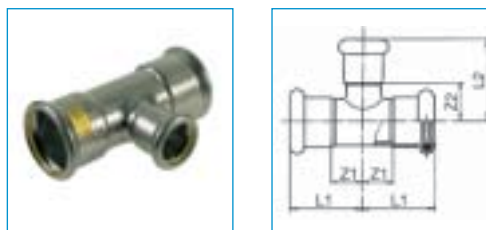


Dimensione	N° articolo	L1	Z1	L2	Z2
18 x 15 x 18	21088	39,0	19,0	35	15
22 x 15 x 22	21089	41,0	20,0	36	16
22 x 18 x 22	21090	41,5	20,5	38	18
28 x 15 x 28	21091	46,0	23,0	42	22
28 x 18 x 28	21092	46,0	23,0	42	22
28 x 22 x 28	21093	46,0	23,0	45	24
35 x 15 x 35	21094	50,0	24,0	43	23
35 x 18 x 35	21095	50,5	14,5	44	24
35 x 22 x 35	21096	50,0	24,0	47	26
35 x 28 x 35	21097	51,0	25,0	49	26
42 x 22 x 42	21098	59,0	29,0	50	29
42 x 28 x 42	21099	59,0	29,0	53	30
42 x 35 x 42	21100	59,0	29,0	57	31
54 x 22 x 54	21101	71,0	36,0	56	35
54 x 28 x 54	21102	71,0	36,0	59	36
54 x 35 x 54	21103	71,0	36,0	64	38
54 x 42 x 54	21104	71,0	36,0	68	38

77

R 2714G Raccordo a T


(3 x pressato)

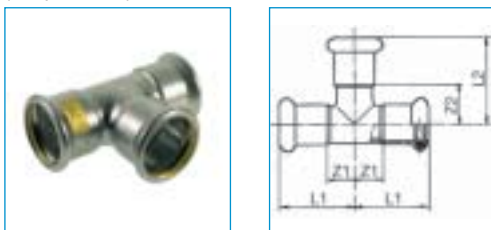

Dimensione	N° articolo	L1	Z1	L2	Z2
15 x 15 x 15	21078	37,0	17,0	34	14
18 x 18 x 18	21079	39,0	19,0	39	19
22 x 22 x 22	21080	41,5	20,5	40	19
28 x 28 x 28	21081	46,0	23,0	47	24
35 x 35 x 35	21082	50,5	24,5	54	28
42 x 42 x 42	21083	59,0	29,0	60	30
54 x 54 x 54	21084	71,0	36,0	71	36

R 2718G Raccordo a T con derivazione filetto femmina


(pressato x filetto interno x pressato)

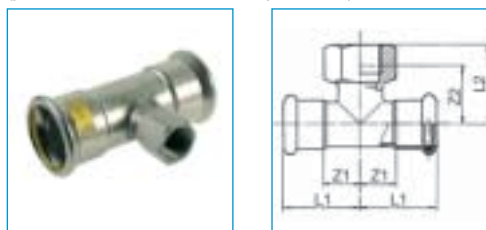

Dimensione	N°	L1	Z1	L2	Z2
15 x Rp1/2	21105	37,0	17,0	37,0	22,0
18 x Rp1/2	21106	39,0	19,0	38,0	23,0
18 x Rp3/4	21107	39,0	19,0	42,7	26,4
22 x Rp1/2	21108	41,0	20,0	41,0	26,0
22 x Rp3/4	21109	41,5	20,5	41,0	24,7
28 x Rp1/2	21110	46,0	23,0	44,0	29,0
28 x Rp3/4	21111	46,0	23,0	45,0	28,7
35 x Rp1/2	21112	50,0	24,0	47,0	32,0
35 x Rp3/4	21113	50,0	24,0	48,0	31,7
42 x Rp1/2	21114	59,0	29,0	46,0	31,0
54 x Rp3/4	21116	71,0	36,0	58,0	41,7
54 x Rp1/2	21115	69,0	34,0	54,0	39,0
54 x Rp2 x 54	21117	71,5	36,5	70,0	44,3

R 2707G Riduzione MM


(pressato x estremità di inserimento)



Dimensione	N° articolo	L	Z	d1	d2
Ø18 x 15	21059	57	37	Ø18	15
Ø22 x 15	21060	60	40	Ø22	15
Ø22 x 18	21061	57	37	Ø22	18
Ø28 x 15	21062	73	53	Ø28	15
Ø28 x 18	21063	77	57	Ø28	18
Ø28 x 22	21064	68	47	Ø28	22
Ø35 x 22	21065	83	62	Ø35	22
Ø35 x 28	21066	74	51	Ø35	28
Ø42 x 28	21067	100	77	Ø42	28
Ø42 x 35	21068	89	63	Ø42	35
Ø54 x 28	21069	100	77	Ø54	28
Ø54 x 35	21070	127	101	Ø54	35
Ø54 x 42	21071	102	72	Ø54	42

R 2702G Manicotto misto con filetto femmina

(pressato x filetto interno)




Dimensione	N° articolo	L	Z
15 x Rp1/2	21134	53	18,0
18 x Rp1/2	21135	51	16,0
22 x Rp1/2	21136	52	16,0
22 x Rp3/4	21137	62	24,7
22 x Rp1	21138	84	44,0
28 x Rp1	21139	67	25,0
35 x Rp1	21141	88	43,0
35 x Rp1 1/4	21140	71	23,6
42 x Rp1 1/2	21142	73	21,6
54 x Rp2	21144	85	24,3

78

R 2705G Manicotto misto con filetto maschio


(pressato x filetto esterno)



Dimensione	N° articolo	L	Z
15 x R1/2	21123	52	32
18 x R1/2	21124	52	32
22 x R1/2	21125	67	46
22 x R1	21127	72	51
22 x R3/4	21126	57	36
28 x R1	21128	62	39
35 x R1	21130	83	57
35 x R1 1/4	21129	69	43
35 x R1 1/2	21131	84	58
42 x R1 1/2	21132	74	44
54 x R2	21133	86	51

R 2728G Gomito misto a 90° con filetto maschio


(pressato x filetto esterno)



Dimensione	N° articolo	L2	Z	L1
15 x R1/2	21145	56	36	37
18 x R1/2	21146	56	36	37
22 x R3/4	21147	59	38	39
28 x R1	21148	65	42	44
35 x R1 1/4	21149	71	45	49

R 2709G Gomito misto a 90° con filetto femmina


(pressato x filetto interno)



Dimensione	N° articolo	L2	Z2	L1	Z1
15 x Rp1/2	21150	56	36	37	22,0
18 x Rp1/2	21151	56	36	39	24,0
22 x Rp3/4	21152	59	38	46	29,7
28 x Rp1	21153	65	42	54	35,0
35 x Rp1 1/4	21154	71	45	63	41,6

R 2741G Manicotto a dado libero


(1 x pressato) secondo DIN 3436 per chiusura

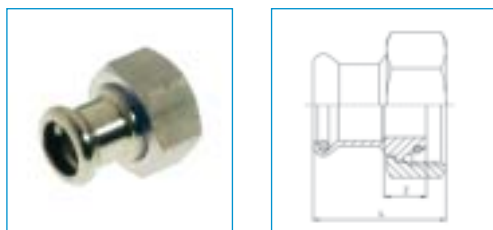

Dimensione	N° articolo	L	Z
15 x G7/8	21180	33	9
22 x G1 1/8	21158	42	16
28 x G1 3/8	21159	45	17

R 2729G Tappo femmina per chiusura definitiva


(1 x pressato)

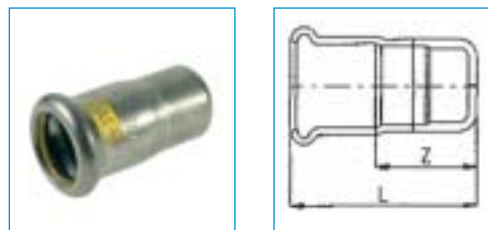

Dimensione	N° articolo	L	Z
15	21205	37,0	17,0
18	21206	39,0	19,0
22	21207	41,0	20,0
28	21208	46,0	23,0
35	21209	51,0	25,0
42	21210	60,0	30,0
54	21211	71,0	36,0

R 2716G Gomito misto a 90° femmina con flangia

(pressato x filetto interno)

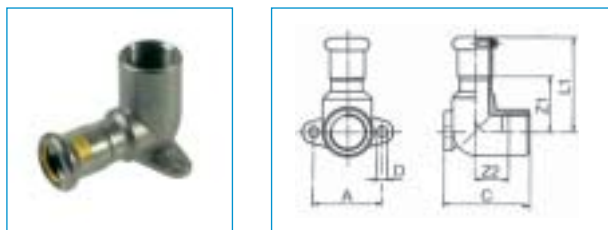

Dimensione	N° articolo	D	L1	Z1	A	Z2	C
15 x Rp1/2	21155	5	49	29	34	15,0	43
18 x Rp1/2	21156	5	49	29	34	15,0	43
22 x Rp3/4	21157	6	53	32	40	17,7	51

R 2755G O-ring di tenuta

(in HNBR giallo) per acciaio inossidabile GAS




Dimensione	N° articolo
15	21191
18	21192
22	21193
28	21194
35	21195
42	21196
54	21197

79

R 2726G Pezzo flangiato PN10/16

(1 x pressato)

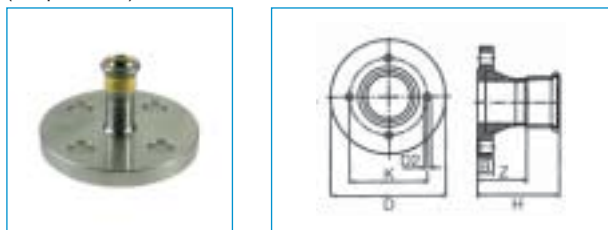

Dim.	N° articolo	Z	D	H	K	B	D2	Fori
22	21160	42,5	105	63,5	75	12	14	4
28	21161	48,0	115	71,0	85	14	14	4
35	21162	53,0	140	79,0	100	15	18	4
42	21163	61,0	150	91,0	110	16	18	4
54	21164	77,0	165	112,0	125	18	18	4

80